

The image displays four KLM Power Audio Class-D Mixer Amplifiers, stacked vertically. Each unit is black with silver accents and features a carrying handle on the left side. The units are labeled as follows:

- LPM-1000 HV:** 1000 WATTS CLASS-D MIXER AMPLIFIER. Features 8 MIC inputs, 4 AUX inputs, and a digital display showing 1000 WATTS output power.
- LPM-700 HV:** 700 WATTS CLASS-D MIXER AMPLIFIER. Features 4 MIC inputs, 2 AUX inputs, and a digital display showing 700 WATTS output power.
- LPM-500 HV:** 500 WATTS CLASS-D MIXER AMPLIFIER. Features 3 MIC inputs, 2 AUX inputs, and a digital display showing 500 WATTS output power.
- LPM-300 HV:** 300 WATTS CLASS-D MIXER AMPLIFIER. Features 2 MIC inputs, 2 AUX inputs, and a digital display showing 300 WATTS output power.

Each unit includes a variety of inputs (MIC, AUX, BASS, MID, TREBLE), a digital display, and control buttons (LIMITER, DELAY, ZONE A, ZONE B, CHIME, MUTE, POWER). The units are connected via USB, SD CARD, and Bluetooth.

ALL RIGHTS RESERVED. ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT ANY NOTICE

# LPM

## S E R I E S

---

### PROFESSIONAL MIXER AMPLIFIER



The KLM POWER™ LPM family of Professional Mixer Amplifiers is engineered to redefine commercial audio reinforcement by integrating a high-efficiency Class-D power amplifier, professional digital signal processing and an intelligent multi-input mixer into a single compact platform.

Designed for premium installed audio, the LPM delivers exceptional speech intelligibility, musical accuracy and long-term operational reliability across every installation.

The technological advancements of the LPM extend beyond conventional mixer amplifiers. Featuring ultra-low distortion (<0.06% THD), integrated DSP, real-time system monitoring, USB & Bluetooth media playback, and intelligent multi-stage protection, the LPM delivers uncompromised audio performance while dramatically simplifying system architecture.

Supporting both 4Ω Low Impedance and 70V / 100V Constant Voltage loudspeaker systems, the LPM seamlessly adapts to distributed audio installations ranging from retail stores and hotels to educational campuses, corporate facilities and industrial complexes.

The integrated DSP, delay processing and limiter functions eliminate the need for multiple external processors, reducing installation complexity while improving overall system reliability.

Powering the platform is KLM POWER's high-efficiency switched-mode power architecture, engineered to deliver stable performance across wide input voltage variations, changing load conditions and demanding operating temperatures. The result is authoritative LOW frequencies, articulate vocal reproduction and crisp HIGH frequencies under continuous operation.

The LPM further incorporates an intelligent LCD control interface providing real-time monitoring of output power, amplifier status, supply voltage, operating temperature and protection conditions. Combined with professional microphone inputs, independent music channels, master equalisation and media playback, the LPM becomes a complete all-in-one solution for modern commercial sound reinforcement.

The LPM family is available in 300W, 500W, 700W and 1000W models, each optimized for premium installed audio applications where reliability, flexibility and ease of deployment are paramount.

**AMPLIFICATION REDEFINED. AUDIO RE-IMAGINED.**

# LPM-1000HV



## TECHNICAL SPECIFICATIONS

### AUDIO POWER OUTPUT (ALL CHANNELS DRIVEN)

500W<sub>RMS</sub> @ 4 OHMS X 2CH (24% DUTY CYCLE)  
500W<sub>RMS</sub> @ 8 OHMS X 2CH (24% DUTY CYCLE)

**FREQUENCY RESPONSE :** 20HZ - 20KHZ ( -3dB ROLL OFF )

**TOTAL HARMONIC DISTORTION :** <0.06% AT FULL POWER / ALL CHANNELS DRIVEN @ 4 OHMS

**CHANNEL SEPARATION / CROSSTALK:** >120 dB

**INPUT SENSITIVITY:** +1.5 dBu FOR MAXIMUM POWER OUTPUT

**INPUT IMPEDANCE:** 33K OHMS BALANCED

**DAMPING FACTOR:** 600 : EXHIBITED AT 4 OHMS FOR 60 HZ SINUSOIDAL WAVEFORM

## TECHNICAL FEATURES

**OUTPUT CONFIGURATION:** 4 OHMS LOW IMPEDANCE OUTPUT | 8 OHMS LOW IMPEDANCE OUTPUT | 70V CONSTANT VOLTAGE LINE | 100V CONSTANT VOLTAGE LINE

**MICROPHONE INPUTS:** 8 × BALANCED MIC INPUTS | COMBO XLR/TRS CONNECTORS | INDEPENDENT GAIN CONTROL

**MUSIC INPUTS:** 4 × STEREO LINE INPUTS | RCA CONNECTORS | USB MEDIA PLAYBACK | BLUETOOTH AUDIO STREAMING

**AUDIO OUTPUTS:** RECORD OUTPUT (STEREO RCA) | MONITOR OUTPUT (STEREO RCA) | 2 × ZONE OUTPUTS

**DIGITAL PROCESSING:** INTEGRATED PROFESSIONAL DSP LIMITER | DELAY | BASS / MID / TREBLE EQ | LCD SYSTEM MONITORING

**FRONT PANEL FEATURES:** 5" COLOUR TFT DISPLAY | ROTARY ENCODER NAVIGATION | MASTER VOLUME CONTROL | DUAL LEVEL METERING | TEMPERATURE MONITORING | OUTPUT POWER MONITORING | SUPPLY VOLTAGE MONITORING | ZONE STATUS INDICATORS | CHIME & MUTE CONTROLS

**REAR PANEL CONNECTIONS INPUTS:** 8 × MIC COMBO INPUTS | 4 × STEREO RCA INPUTS | USB MEDIA INTERFACE | BLUETOOTH RECEIVER


**OUTPUTS:** SPEAKON SPEAKER OUTPUTS | 70V LINE OUTPUT | 100V LINE OUTPUT | ZONE A OUTPUT | ZONE B OUTPUT | RECORD OUT | MONITOR OUT

**COMMUNICATION:** ETHERNET PORT | USB DSP PROGRAMMING PORT | SERVICE PORT

**MULTI-STAGE INTELLIGENT PROTECTION:** SHORT CIRCUIT PROTECTION | OVER CURRENT PROTECTION | THERMAL PROTECTION | DC PROTECTION | OUTPUT CLIPPING LIMITER | SOFT START | OVER VOLTAGE PROTECTION | UNDER VOLTAGE PROTECTION | SPEAKER PROTECTION

### POWER MANAGEMENT

INPUT VOLTAGE : 150 ~ 290 V AC @ 50 HZ  
MAXIMUM INPUT CURRENT : 5.1 AMPERES

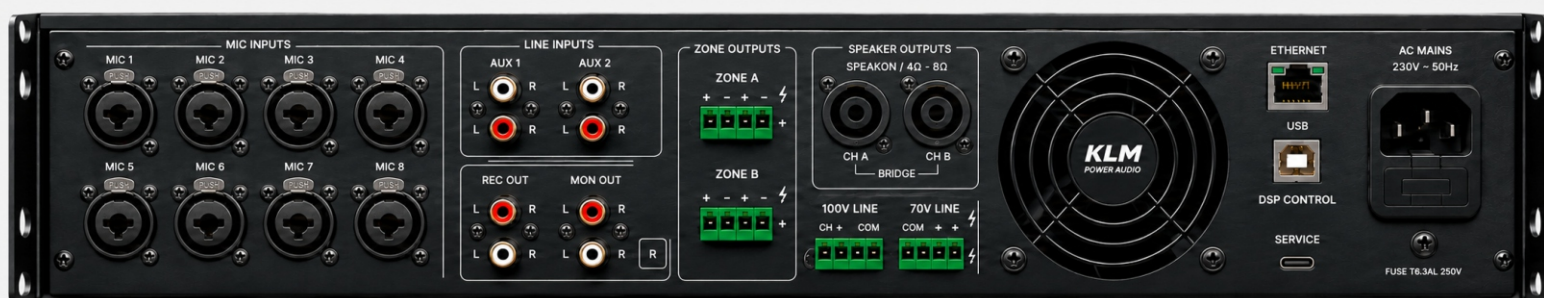

**AMPLIFICATION REDEFINED. AUDIO RE-IMAGINED.**

[WWW.KLMPowERAudio.COM](http://WWW.KLMPowERAudio.COM)

ALL RIGHTS RESERVED. ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT ANY NOTICE

# LPM-700HV



## TECHNICAL SPECIFICATIONS

### AUDIO POWER OUTPUT (ALL CHANNELS DRIVEN)

350W<sub>RMS</sub> @ 4 OHMS X 2CH (24% DUTY CYCLE)

350W<sub>RMS</sub> @ 8 OHMS X 2CH (24% DUTY CYCLE)

**FREQUENCY RESPONSE :** 20HZ - 20KHZ ( -3dB ROLL OFF )

**TOTAL HARMONIC DISTORTION :** <0.06% AT FULL POWER / ALL CHANNELS DRIVEN @ 4 OHMS

**CHANNEL SEPARATION / CROSSTALK:** >120 dB

**INPUT SENSITIVITY:** +1.5 dBu FOR MAXIMUM POWER OUTPUT

**INPUT IMPEDANCE:** 33K OHMS BALANCED

**DAMPING FACTOR:** 600 : EXHIBITED AT 4 OHMS FOR 60 HZ SINUSOIDAL WAVEFORM

## TECHNICAL FEATURES

**OUTPUT CONFIGURATION:** 4 OHMS LOW IMPEDANCE OUTPUT | 8 OHMS LOW IMPEDANCE OUTPUT | 70V CONSTANT VOLTAGE LINE | 100V CONSTANT VOLTAGE LINE

**MICROPHONE INPUTS:** 6 × BALANCED MIC INPUTS | COMBO XLR/TRS CONNECTORS | INDEPENDENT GAIN CONTROL

**MUSIC INPUTS:** 3 × STEREO LINE INPUTS | RCA CONNECTORS | USB MEDIA PLAYBACK | BLUETOOTH AUDIO STREAMING

**AUDIO OUTPUTS:** RECORD OUTPUT (STEREO RCA) | MONITOR OUTPUT (STEREO RCA) | 2 × ZONE OUTPUTS

**DIGITAL PROCESSING:** INTEGRATED PROFESSIONAL DSP LIMITER | DELAY | BASS / MID / TREBLE EQ | LCD SYSTEM MONITORING

**FRONT PANEL FEATURES:** 5" COLOUR TFT DISPLAY | ROTARY ENCODER NAVIGATION | MASTER VOLUME CONTROL | DUAL LEVEL METERING | TEMPERATURE MONITORING | OUTPUT POWER MONITORING | SUPPLY VOLTAGE MONITORING | ZONE STATUS INDICATORS | CHIME & MUTE CONTROLS

**REAR PANEL CONNECTIONS INPUTS:** 6 × MIC COMBO INPUTS | 3 × STEREO RCA INPUTS | USB MEDIA INTERFACE | BLUETOOTH RECEIVER

**OUTPUTS:** SPEAKON SPEAKER OUTPUTS | 70V LINE OUTPUT | 100V LINE OUTPUT | ZONE A OUTPUT | ZONE B OUTPUT | RECORD OUT | MONITOR OUT


**COMMUNICATION:** ETHERNET PORT | USB DSP PROGRAMMING PORT | SERVICE PORT

**MULTI-STAGE INTELLIGENT PROTECTION:** SHORT CIRCUIT PROTECTION | OVER CURRENT PROTECTION | THERMAL PROTECTION | DC PROTECTION | OUTPUT CLIPPING LIMITER | SOFT START | OVER VOLTAGE PROTECTION | UNDER VOLTAGE PROTECTION | SPEAKER PROTECTION

### POWER MANAGEMENT

INPUT VOLTAGE : 150 ~ 290 V AC @ 50 HZ

MAXIMUM INPUT CURRENT : 5.1 AMPERES

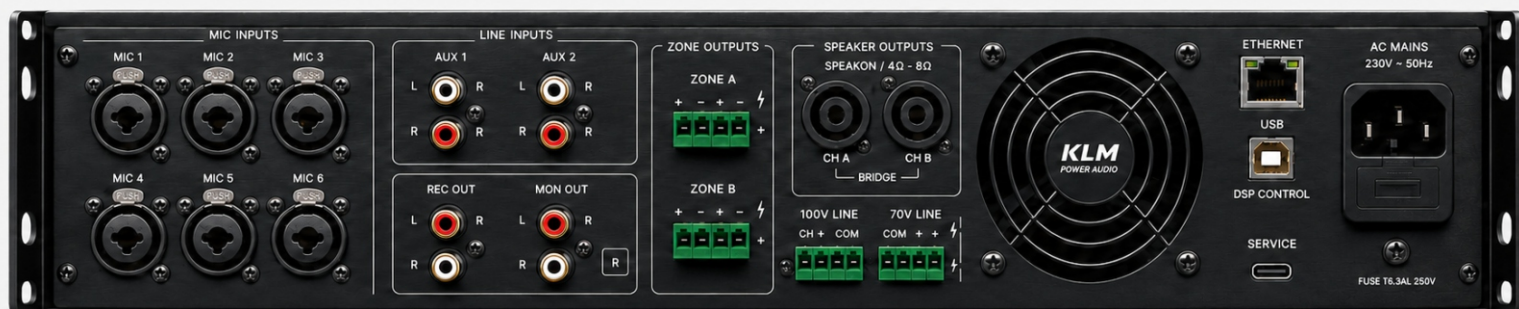

**AMPLIFICATION REDEFINED. AUDIO RE-IMAGINED.**

[WWW.KLMPowERAudio.COM](http://WWW.KLMPowERAudio.COM)

ALL RIGHTS RESERVED. ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT ANY NOTICE

# LPM-500HV



## TECHNICAL SPECIFICATIONS

### AUDIO POWER OUTPUT (ALL CHANNELS DRIVEN)

250W<sub>RMS</sub> @ 4 OHMS X 2CH (24% DUTY CYCLE)  
250W<sub>RMS</sub> @ 8 OHMS X 2CH (24% DUTY CYCLE)

**FREQUENCY RESPONSE :** 20HZ - 20KHZ ( -3dB ROLL OFF )

**TOTAL HARMONIC DISTORTION :** <0.06% AT FULL POWER / ALL CHANNELS DRIVEN @ 4 OHMS

**CHANNEL SEPARATION / CROSSTALK:** >120 dB

**INPUT SENSITIVITY:** +1.5 dBu FOR MAXIMUM POWER OUTPUT

**INPUT IMPEDANCE:** 33K OHMS BALANCED

**DAMPING FACTOR:** 600 : EXHIBITED AT 4 OHMS FOR 60 HZ SINUSOIDAL WAVEFORM

## TECHNICAL FEATURES

**OUTPUT CONFIGURATION:** 4 OHMS LOW IMPEDANCE OUTPUT | 8 OHMS LOW IMPEDANCE OUTPUT | 70V CONSTANT VOLTAGE LINE | 100V CONSTANT VOLTAGE LINE

**MICROPHONE INPUTS:** 4 × BALANCED MIC INPUTS | COMBO XLR/TRS CONNECTORS | INDEPENDENT GAIN CONTROL

**MUSIC INPUTS:** 2 × STEREO LINE INPUTS | RCA CONNECTORS | USB MEDIA PLAYBACK | BLUETOOTH AUDIO STREAMING

**AUDIO OUTPUTS:** RECORD OUTPUT (STEREO RCA) | MONITOR OUTPUT (STEREO RCA) | 2 × ZONE OUTPUTS

**DIGITAL PROCESSING:** INTEGRATED PROFESSIONAL DSP LIMITER | DELAY | BASS / MID / TREBLE EQ | LCD SYSTEM MONITORING

**FRONT PANEL FEATURES:** 5" COLOUR TFT DISPLAY | ROTARY ENCODER NAVIGATION | MASTER VOLUME CONTROL | DUAL LEVEL METERING | TEMPERATURE MONITORING | OUTPUT POWER MONITORING | SUPPLY VOLTAGE MONITORING | ZONE STATUS INDICATORS | CHIME & MUTE CONTROLS

**REAR PANEL CONNECTIONS INPUTS:** 4 × MIC COMBO INPUTS | 2 × STEREO RCA INPUTS | USB MEDIA INTERFACE | BLUETOOTH RECEIVER


**OUTPUTS:** SPEAKON SPEAKER OUTPUTS | 70V LINE OUTPUT | 100V LINE OUTPUT | ZONE A OUTPUT | ZONE B OUTPUT | RECORD OUT | MONITOR OUT

**COMMUNICATION:** ETHERNET PORT | USB DSP PROGRAMMING PORT | SERVICE PORT

**MULTI-STAGE INTELLIGENT PROTECTION:** SHORT CIRCUIT PROTECTION | OVER CURRENT PROTECTION | THERMAL PROTECTION | DC PROTECTION | OUTPUT CLIPPING LIMITER | SOFT START | OVER VOLTAGE PROTECTION | UNDER VOLTAGE PROTECTION | SPEAKER PROTECTION

## POWER MANAGEMENT

INPUT VOLTAGE : 150 ~ 290 V AC @ 50 HZ  
MAXIMUM INPUT CURRENT : 5.1 AMPERES

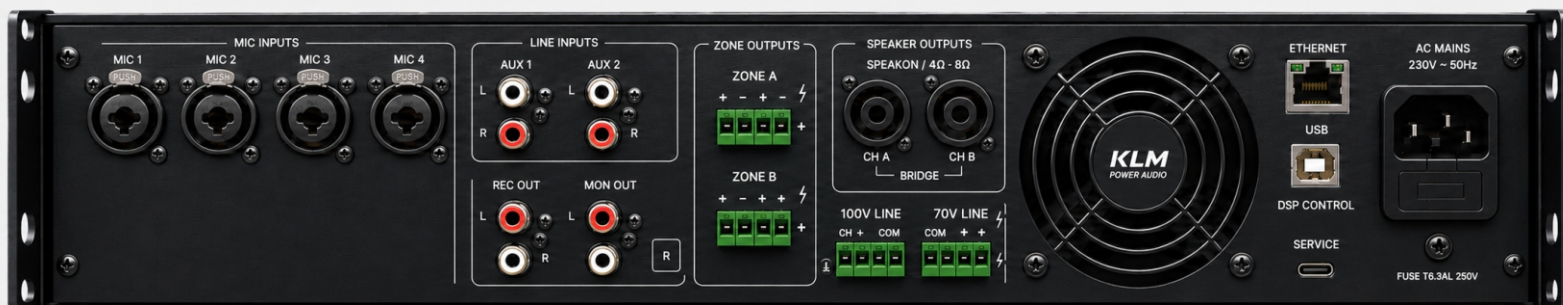

**AMPLIFICATION REDEFINED. AUDIO RE-IMAGINED.**

[WWW.KLMPowERAudio.COM](http://WWW.KLMPowERAudio.COM)

ALL RIGHTS RESERVED. ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT ANY NOTICE

# LPM-300HV



## TECHNICAL SPECIFICATIONS

### AUDIO POWER OUTPUT (ALL CHANNELS DRIVEN)

150W<sub>RMS</sub> @ 4 OHMS X 2CH (24% DUTY CYCLE)  
150W<sub>RMS</sub> @ 8 OHMS X 2CH (24% DUTY CYCLE)

**FREQUENCY RESPONSE :** 20HZ - 20KHZ ( -3dB ROLL OFF )

**TOTAL HARMONIC DISTORTION :** <0.06% AT FULL POWER / ALL CHANNELS DRIVEN @ 4 OHMS

**CHANNEL SEPARATION / CROSSTALK:** >120 dB

**INPUT SENSITIVITY:** +1.5 dBu FOR MAXIMUM POWER OUTPUT

**INPUT IMPEDANCE:** 33K OHMS BALANCED

**DAMPING FACTOR:** 600 : EXHIBITED AT 4 OHMS FOR 60 HZ SINUSOIDAL WAVEFORM

## TECHNICAL FEATURES

**OUTPUT CONFIGURATION:** 4 OHMS LOW IMPEDANCE OUTPUT | 8 OHMS LOW IMPEDANCE OUTPUT | 70V CONSTANT VOLTAGE LINE | 100V CONSTANT VOLTAGE LINE

**MICROPHONE INPUTS:** 2× BALANCED MIC INPUTS | COMBO XLR/TRS CONNECTORS | INDEPENDENT GAIN CONTROL

**MUSIC INPUTS:** 2 × STEREO LINE INPUTS | RCA CONNECTORS | USB MEDIA PLAYBACK | BLUETOOTH AUDIO STREAMING

**AUDIO OUTPUTS:** RECORD OUTPUT (STEREO RCA) | MONITOR OUTPUT (STEREO RCA) | 2 × ZONE OUTPUTS

**DIGITAL PROCESSING:** INTEGRATED PROFESSIONAL DSP LIMITER | DELAY | BASS / MID / TREBLE EQ | LCD SYSTEM MONITORING

**FRONT PANEL FEATURES:** 5" COLOUR TFT DISPLAY | ROTARY ENCODER NAVIGATION | MASTER VOLUME CONTROL | DUAL LEVEL METERING | TEMPERATURE MONITORING | OUTPUT POWER MONITORING | SUPPLY VOLTAGE MONITORING | ZONE STATUS INDICATORS | CHIME & MUTE CONTROLS

**REAR PANEL CONNECTIONS INPUTS:** 2 × MIC COMBO INPUTS | 2 × STEREO RCA INPUTS | USB MEDIA INTERFACE | BLUETOOTH RECEIVER


**OUTPUTS:** SPEAKON SPEAKER OUTPUTS | 70V LINE OUTPUT | 100V LINE OUTPUT | ZONE A OUTPUT | ZONE B OUTPUT | RECORD OUT | MONITOR OUT

**COMMUNICATION:** ETHERNET PORT | USB DSP PROGRAMMING PORT | SERVICE PORT

**MULTI-STAGE INTELLIGENT PROTECTION:** SHORT CIRCUIT PROTECTION | OVER CURRENT PROTECTION | THERMAL PROTECTION | DC PROTECTION | OUTPUT CLIPPING LIMITER | SOFT START | OVER VOLTAGE PROTECTION | UNDER VOLTAGE PROTECTION | SPEAKER PROTECTION

### POWER MANAGEMENT

INPUT VOLTAGE : 150 ~ 290 V AC @ 50 HZ  
MAXIMUM INPUT CURRENT : 5.1 AMPERES

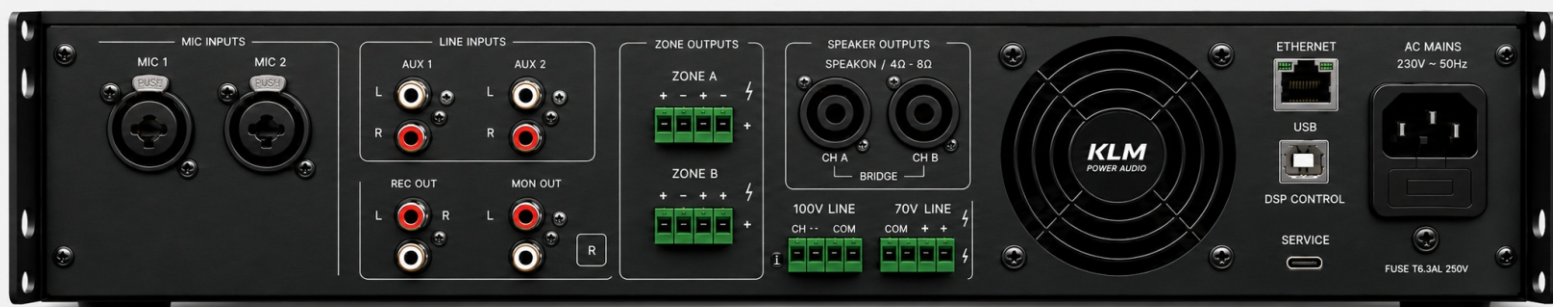

**AMPLIFICATION REDEFINED. AUDIO RE-IMAGINED.**

[WWW.KLMPowERAudio.COM](http://WWW.KLMPowERAudio.COM)

ALL RIGHTS RESERVED. ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT ANY NOTICE

LPM

S E R I E S

PROFESSIONAL MIXER AMPLIFIER



|                                          | LPM-1000HV                                                                                                                                                                                                                     | LPM-700HV                                                                                                  | LPM-500HV                                                                                                  | LPM-300HV                                                                                                  |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| TECHNICAL SPECIFICATIONS                 |                                                                                                                                                                                                                                |                                                                                                            |                                                                                                            |                                                                                                            |
| AUDIO POWER OUTPUT (ALL CHANNELS DRIVEN) | 500W <sub>RMS</sub> @ 4 OHMS X 2CH (24% DUTY CYCLE)<br>500W <sub>RMS</sub> @ 8 OHMS X 2CH (24% DUTY CYCLE)                                                                                                                     | 350W <sub>RMS</sub> @ 4 OHMS X 2CH (24% DUTY CYCLE)<br>350W <sub>RMS</sub> @ 8 OHMS X 2CH (24% DUTY CYCLE) | 250W <sub>RMS</sub> @ 4 OHMS X 2CH (24% DUTY CYCLE)<br>250W <sub>RMS</sub> @ 8 OHMS X 2CH (24% DUTY CYCLE) | 150W <sub>RMS</sub> @ 4 OHMS X 2CH (24% DUTY CYCLE)<br>150W <sub>RMS</sub> @ 8 OHMS X 2CH (24% DUTY CYCLE) |
| FREQUENCY RESPONSE                       | 20HZ - 20KHZ ( -3dB ROLL OFF )                                                                                                                                                                                                 |                                                                                                            |                                                                                                            |                                                                                                            |
| TOTAL HARMONIC DISTORTION                | <0.06% AT FULL POWER / ALL CHANNELS DRIVEN @ 4 OHMS                                                                                                                                                                            |                                                                                                            |                                                                                                            |                                                                                                            |
| CHANNEL SEPARATION                       | > 120 dB                                                                                                                                                                                                                       |                                                                                                            |                                                                                                            |                                                                                                            |
| INPUT SENSITIVITY                        | +1.5 dBU FOR MAXIMUM POWER OUTPUT                                                                                                                                                                                              |                                                                                                            |                                                                                                            |                                                                                                            |
| INPUT IMPEDANCE                          | 33K OHMS BALANCED                                                                                                                                                                                                              |                                                                                                            |                                                                                                            |                                                                                                            |
| DAMPING FACTOR                           | 600 : EXHIBITED AT 4 OHMS FOR 60 HZ SINUSOIDAL WAVEFORM                                                                                                                                                                        |                                                                                                            |                                                                                                            |                                                                                                            |
| TECHNICAL FEATURES                       |                                                                                                                                                                                                                                |                                                                                                            |                                                                                                            |                                                                                                            |
| OUTPUT CONFIGURATION                     | 4 OHMS LOW IMPEDANCE OUTPUT   8 OHMS LOW IMPEDANCE OUTPUT   70V CONSTANT VOLTAGE LINE   100V CONSTANT VOLTAGE LINE                                                                                                             |                                                                                                            |                                                                                                            |                                                                                                            |
| MICROPHONE INPUTS                        | 8 X BALANCED MIC INPUTS   COMBO XLR/TRS CONNECTORS   INDEPENDENT GAIN CONTROL                                                                                                                                                  | 6 X BALANCED MIC INPUTS   COMBO XLR/TRS CONNECTORS   INDEPENDENT GAIN CONTROL                              | 4 X BALANCED MIC INPUTS   COMBO XLR/TRS CONNECTORS   INDEPENDENT GAIN CONTROL                              | 2 X BALANCED MIC INPUTS   COMBO XLR/TRS CONNECTORS   INDEPENDENT GAIN CONTROL                              |
| MUSIC INPUTS                             | 4 × STEREO LINE INPUTS   RCA CONNECTORS   USB MEDIA PLAYBACK   BLUETOOTH AUDIO STREAMING                                                                                                                                       | 3 × STEREO LINE INPUTS   RCA CONNECTORS   USB MEDIA PLAYBACK   BLUETOOTH AUDIO STREAMING                   | 2 × STEREO LINE INPUTS   RCA CONNECTORS   USB MEDIA PLAYBACK   BLUETOOTH AUDIO STREAMING                   | 2 × STEREO LINE INPUTS   RCA CONNECTORS   USB MEDIA PLAYBACK   BLUETOOTH AUDIO STREAMING                   |
| AUDIO OUTPUTS                            | RECORD OUTPUT (STEREO RCA)   MONITOR OUTPUT (STEREO RCA)   2 × ZONE OUTPUTS                                                                                                                                                    |                                                                                                            |                                                                                                            |                                                                                                            |
| DIGITAL PROCESSING                       | INTEGRATED PROFESSIONAL DSP LIMITER   DELAY   BASS / MID / TREBLE EQ   LCD SYSTEM MONITORING                                                                                                                                   |                                                                                                            |                                                                                                            |                                                                                                            |
| FRONT PANEL FEATURES                     | 5" COLOUR TFT DISPLAY   ROTARY ENCODER NAVIGATION   MASTER VOLUME CONTROL   DUAL LEVEL METERING   TEMPERATURE MONITORING   OUTPUT POWER MONITORING   SUPPLY VOLTAGE MONITORING   ZONE STATUS INDICATORS   CHIME & MUTE CONTROL |                                                                                                            |                                                                                                            |                                                                                                            |
| REAR PANEL CONNECTIONS                   | 8 × MIC COMBO INPUTS   4 × STEREO RCA INPUTS   USB MEDIA INTERFACE   BLUETOOTH RECEIVER                                                                                                                                        | 6 × MIC COMBO INPUTS   3 × STEREO RCA INPUTS   USB MEDIA INTERFACE   BLUETOOTH RECEIVER                    | 4 × MIC COMBO INPUTS   2 × STEREO RCA INPUTS   USB MEDIA INTERFACE   BLUETOOTH RECEIVER                    | 2 × MIC COMBO INPUTS   2 × STEREO RCA INPUTS   USB MEDIA INTERFACE   BLUETOOTH RECEIVER                    |
| OUTPUTS                                  | SPEAKON SPEAKER OUTPUTS   70V LINE OUTPUT   100V LINE OUTPUT   ZONE A OUTPUT   ZONE B OUTPUT   RECORD OUT   MONITOR OUT                                                                                                        |                                                                                                            |                                                                                                            |                                                                                                            |
| COMMUNICATION                            | ETHERNET PORT   USB DSP PROGRAMMING   SERVICE PORT                                                                                                                                                                             |                                                                                                            |                                                                                                            |                                                                                                            |
| MULTI-STAGE INTELLIGENT PROTECTION       | SHORT CIRCUIT PROTECTION   OVER CURRENT PROTECTION   THERMAL PROTECTION   DC PROTECTION   OUTPUT CLIPPING LIMITER   SOFT START   OVER VOLTAGE PROTECTION   UNDER VOLTAGE PROTECTION   SPEAKER PROTECTION                       |                                                                                                            |                                                                                                            |                                                                                                            |
| POWER MANAGEMENT                         | INPUT VOLTAGE : 150 ~ 290 V AC @ 50 HZ<br>MAXIMUM INPUT CURRENT : 5.1 AMPERES                                                                                                                                                  | INPUT VOLTAGE : 150 ~ 290 V AC @ 50 HZ<br>MAXIMUM INPUT CURRENT : 5.1 AMPERES                              | INPUT VOLTAGE : 150 ~ 290 V AC @ 50 HZ<br>MAXIMUM INPUT CURRENT : 5.1 AMPERES                              | INPUT VOLTAGE : 150 ~ 290 V AC @ 50 HZ<br>MAXIMUM INPUT CURRENT : 5.1 AMPERES                              |

AMPLIFICATION REDEFINED. AUDIO RE-IMAGINED.

# LPM

## S E R I E S

### PROFESSIONAL MIXER AMPLIFIER



**AMPLIFICATION REDEFINED. AUDIO RE-IMAGINED.**